


MOAULUS



M1

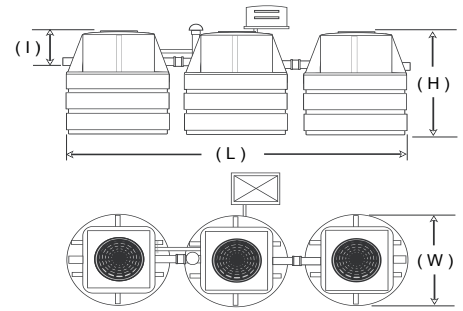

* Shallow installation model

Max Population Equivalent	6
BOD Loading (kg/day)	0.36
Power consumption per day (watts)	80
(I) Inlet Invert (mm)	500
(H) Height (mm)	1610
(L) Length (mm)	4200
(W) Width (mm)	1260

M2



Max Population Equivalent	6
BOD Loading (kg/day)	0.36
Power consumption per day (watts)	80
(I) Inlet Invert (mm)	500
(H) Height (mm)	1610
(L) Length (mm)	4200
(W) Width (mm)	1260

M3




Max Population Equivalent	12
BOD Loading (kg/day)	0.72
Power consumption per day (watts)	100
(I) Inlet Invert (mm)	500
(H) Height (mm)	1610
(L) Length (mm)	4200
(W) Width (mm)	1260

M4



Max Population Equivalent	20
BOD Loading (kg/day)	1.20
Power consumption per day (watts)	120
(I) Inlet Invert (mm)	500
(H) Height (mm)	2100
(L) Length (mm)	4200
(W) Width (mm)	1260

M5

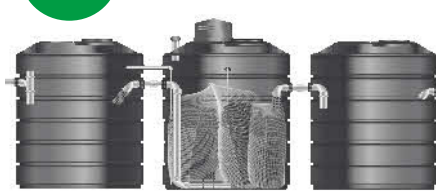

Max Population Equivalent	35
BOD Loading (kg/day)	2.1
Power consumption per day(watts)	150
(I) Inlet Invert (mm)	500
(H) Height (mm)	1920
(L) Length (mm)	5200
(W) Width (mm)	1560

M6



Max Population Equivalent	50
BOD Loading (kg/day)	3.0
Power consumption per day(watts)	200
(I) Inlet Invert (mm)	500
(H) Height (mm)	2350
(L) Length (mm)	7450
(W) Width (mm)	2150

M7



Max Population Equivalent	75
BOD Loading (kg/day)	4.5
Power consumption per day(watts)	300
(I) Inlet Invert (mm)	700
(H) Height (mm)	2550
(L) Length (mm)	10000
(W) Width (mm)	2150

M8



Max Population Equivalent	100
BOD Loading (kg/day)	6
Power consumption per day(watts)	450
(I) Inlet Invert (mm)	700
(H) Height (mm)	2550
(L) Length (mm)	10000
(W) Width (mm)	2150



MODULUS

modular **sewage** treatment systems

May 09